



Strip Heater Solutions


Glo-Ray® Infrared Strip Heaters

Safely hold the temperature of your product without drying out or further cooking food with Hatco's Glo-Ray® Infrared Strip Heaters. The end result is hot, fresh food that's ready-to-serve. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products. Heavy-duty stainless steel housings are available.

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

- Ensures maximum flavor, safety and holding time
- Even heat distribution – no “cold spots”
- Sturdy extruded aluminum housings that do not sag, from 18" to 144" in 12" increments
- Reflector does not blacken, maintaining a consistent heat pattern
- Heavy-duty insulation minimizes heat loss
- Optional sneeze guards (excludes stainless steel models)
- Available in stainless steel housing, from 18" to 96"
- Available with lights (shatter-resistant incandescent lights or optional halogen lights – excludes stainless steel models)

- Pre-focused heat pattern bathes entire holding surface
- Additional reflector styles and lower wattage elements available; consult factory for more information

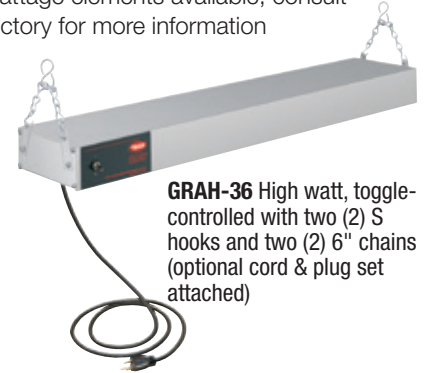

GRAH-36 High watt, toggle-controlled with two (2) S hooks and two (2) 6" chains (optional cord & plug set attached)

ALUMINUM STRIP HEATERS WITH CONDUIT

Model*	Width	Voltage		Watts	Ship Weight
		Single Phase			
Standard Watt					
GRA-18	18"	120, 208, 240		250	7 lbs.
GRA-24	24"	120, 208, 240		350	7 lbs.
GRA-30	30"	120, 208, 240		450	8 lbs.
GRA-36	36"	120, 208, 240		575	9 lbs.
GRA-42	42"	120, 208, 240		675	11 lbs.
GRA-48	48"	120, 208, 240		800	11 lbs.
GRA-54	54"	120, 208, 240		925	13 lbs.
GRA-60	60"	120, 208, 240		1050	14 lbs.
GRA-66	66"	120, 208, 240		1160	16 lbs.
GRA-72	72"	120, 208, 240		1275	17 lbs.
GRA-84 [▼]	84"	120, 208, 240		1500	21 lbs.
GRA-96 [▼]	96"	120, 208, 240		1725	23 lbs.
GRA-108	108"	120, 208, 240		1850	24 lbs.
GRA-120	120"	120, 208, 240		2100	26 lbs.
GRA-132	132"	120, 208, 240		2320	30 lbs.
GRA-144	144"	120, 208, 240		2550	33 lbs.
High Watt					
GRAH-18	18"	120, 208, 240		350	7 lbs.
GRAH-24	24"	120, 208, 240		500	8 lbs.
GRAH-30	30"	120, 208, 240		660	8 lbs.
GRAH-36	36"	120, 208, 240		800	11 lbs.
GRAH-42	42"	120, 208, 240		950	12 lbs.
GRAH-48	48"	120, 208, 240		1100	13 lbs.
GRAH-54	54"	120, 208, 240		1250	14 lbs.
GRAH-60	60"	120, 208, 240		1400	16 lbs.
GRAH-66 [▼]	66"	120, 208, 240		1560	17 lbs.
GRAH-72 [▼]	72"	120, 208, 240		1725	18 lbs.
GRAH-84 [▲]	84"	120, 208, 240		2050	19 lbs.
GRAH-96 [▲]	96"	120, 208, 240		2400	21 lbs.
GRAH-108	108"	120, 208, 240		2500	23 lbs.
GRAH-120	120"	120, 208, 240		2800	26 lbs.
GRAH-132	132"	120, 208, 240		3120	31 lbs.
GRAH-144	144"	120, 208, 240		3450	48 lbs.

* Does not include Remote Control Box (RMB), see pages 34 and 35.
 ▼ When using an infinite control with 120V model, additional switch(es) and tandem (end-to-end) elements are required; cord not available.
 ▲ 120V models require additional switches and tandem (end-to-end) elements.

All Aluminum Strip Heater Models Feature:
Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).
Leads: 3' conduit with leads – server's right. NEMA 5-15P cord available on 120V models 72" or less with C-leg, T-leg stand or chain-hook mount.
 GRAH-66 and GRAH-72 require NEMA 5-20P cord for Canada.
Dimensions: 18"-144"W x 6"D x 2½"H.

OPTIONS AND ACCESSORIES – PAGES 7-8
RECOMMENDED MOUNTING HEIGHTS – PAGE 32

STAINLESS STEEL STRIP HEATERS

Model*	Width	Voltage		Watts	Ship Weight
		Single Phase			
Standard Watt					
GR-18	18"	120, 208, 240		250	7 lbs.
GR-24	24"	120, 208, 240		350	7 lbs.
GR-36	36"	120, 208, 240		575	10 lbs.
GR-48	48"	120, 208, 240		800	12 lbs.
GR-60	60"	120, 208, 240		1050	15 lbs.
GR-72	72"	120, 208, 240		1275	19 lbs.
GR-96*	96"	120, 208, 240		1725	24 lbs.
High Watt					
GRH-18	18"	120, 208, 240		350	7 lbs.
GRH-24	24"	120, 208, 240		500	7 lbs.
GRH-36	36"	120, 208, 240		800	10 lbs.
GRH-48	48"	120, 208, 240		1100	12 lbs.
GRH-60	60"	120, 208, 240		1400	15 lbs.
GRH-72*	72"	120, 208, 240		1725	19 lbs.
GRH-96	96"	208, 240		2400	24 lbs.

* Does not include Remote Control Box (RMB), see pages 34 and 35.
 * Infinite not available in 120V.

All Stainless Steel Strip Heater Models Feature:
Toggle Switch (max. 15 Amps) Location: Chef's left side.
Leads: 3' conduit with leads – server's right. NEMA 5-15P cord available on 120V models 72" or less with C-leg, T-leg stand or chain-hook mount. GRH-72 requires NEMA 5-20P cord for Canada.
Dimensions: 18"-96"W x 6"D x 2¾"H.
Contact factory for stainless marine applications.

ONE (1) YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE (1) ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL-SHEATHED HEATING ELEMENTS.
 STAINLESS STEEL MODELS ARE NOT AVAILABLE WITH LIGHTS, SNEEZE GUARDS OR AS DUAL OR TANDEM UNITS.

