


Glo-Ray® Dual Infrared Strip Heaters

Create a deeper holding area with Glo-Ray® Aluminum Dual Infrared Strip Heaters mounted side-by-side, keeping hot food at optimum serving temperatures. The pre-focused heat pattern directs heat from a metal-sheathed element across the entire holding surface. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

Toggle Switch: Max. 15 Amps
Infinite Switch: Max. 12.2 Amps

- Ensures maximum flavor, safety and holding time
- Provides even heat distribution – no “cold spots”
- Sturdy extruded aluminum housings that do not sag, from 18" to 144" in 12" increments
- Reflector does not blacken, maintaining a consistent heat pattern
- Protective wire guard supports heating element without affecting heat distribution
- 3" or 6" spacer available
- Heavy-duty insulation minimizes heat loss
- Additional reflector styles and lower wattage elements available; consult factory for more information

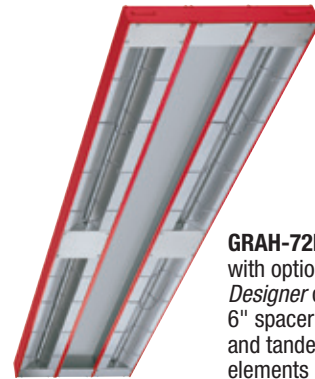

GRAH-72D with optional *Designer* color, 6" spacer and tandem elements

ALUMINUM DUAL STRIP HEATERS WITH CONDUIT

Model*	Width	Voltage		Watts	Ship Weight
		Single Phase			
Standard Watt					
GRA-18D	18"	120, 208, 240		500	14 lbs.
GRA-24D	24"	120, 208, 240		700	16 lbs.
GRA-30D	30"	120, 208, 240		900	18 lbs.
GRA-36D	36"	120, 208, 240		1150	19 lbs.
GRA-42D	42"	120, 208, 240		1350	23 lbs.
GRA-48D	48"	120, 208, 240		1600	27 lbs.
GRA-54D	54"	120, 208, 240		1850	30 lbs.
GRA-60D	60"	120, 208, 240		2100	35 lbs.
GRA-66D	66"	120, 208, 240		2320	36 lbs.
GRA-72D	72"	120, 208, 240		2550	40 lbs.
GRA-84D [▼]	84"	120, 208, 240		3000	50 lbs.
GRA-96D [▼]	96"	120, 208, 240		3450	52 lbs.
GRA-108D	108"	120, 208, 240		3700	59 lbs.
GRA-120D	120"	120, 208, 240		4200	66 lbs.
GRA-132D	132"	120, 208, 240		4640	73 lbs.
GRA-144D	144"	120, 208, 240		5100	80 lbs.
High Watt					
GRAH-18D	18"	120, 208, 240		700	14 lbs.
GRAH-24D	24"	120, 208, 240		1000	16 lbs.
GRAH-30D	30"	120, 208, 240		1320	18 lbs.
GRAH-36D	36"	120, 208, 240		1600	19 lbs.
GRAH-42D	42"	120, 208, 240		1900	23 lbs.
GRAH-48D	48"	120, 208, 240		2200	27 lbs.
GRAH-54D	54"	120, 208, 240		2500	30 lbs.
GRAH-60D	60"	120, 208, 240		2800	35 lbs.
GRAH-66D [▼]	66"	120, 208, 240		3120	36 lbs.
GRAH-72D [▼]	72"	120, 208, 240		3450	40 lbs.
GRAH-84D [▲]	84"	120, 208, 240		4100	50 lbs.
GRAH-96D [▲]	96"	120, 208, 240		4800	52 lbs.
GRAH-108D	108"	120, 208, 240		5000	59 lbs.
GRAH-120D	120"	120, 208, 240		5600	66 lbs.
GRAH-132D	132"	208, 240		6240	73 lbs.
GRAH-144D	144"	208, 240		6900	80 lbs.

* Does not include Remote Control Box (RMB), see pages 34 and 35.

▼ When using an infinite control with 120V model, additional switch(es) and tandem (end-to-end) elements are required.

▲ 120V models require additional switches and tandem (end-to-end) elements.

All Aluminum Dual Strip Heater Models Feature:

Toggle Switch (max. 15 Amps) Location: Chef's left side (unless otherwise specified).

Leads: 3' conduit with leads – server's right.

Dimensions: With 3" Spacer (Standard): 18"-144"W x 15"D x 2½"H.

With 6" Spacer: 18"-144"W x 18"D x 2½"H.

OPTIONS AND ACCESSORIES – PAGE 11
RECOMMENDED MOUNTING HEIGHTS – PAGE 32

NOTE: 120V models may require additional switches.



GRA-36D with standard 3" spacer

ONE (1) YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE (1) ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL-SHEATHED HEATING ELEMENTS.

