




# BB96XX, BB120XX & BB150XX BANQUET CARTERS for plates up 12-3/4"

CARTER-HOFFMANN  
11  
BANQUET CARTS  
FOOD SERVICE EQUIPMENT

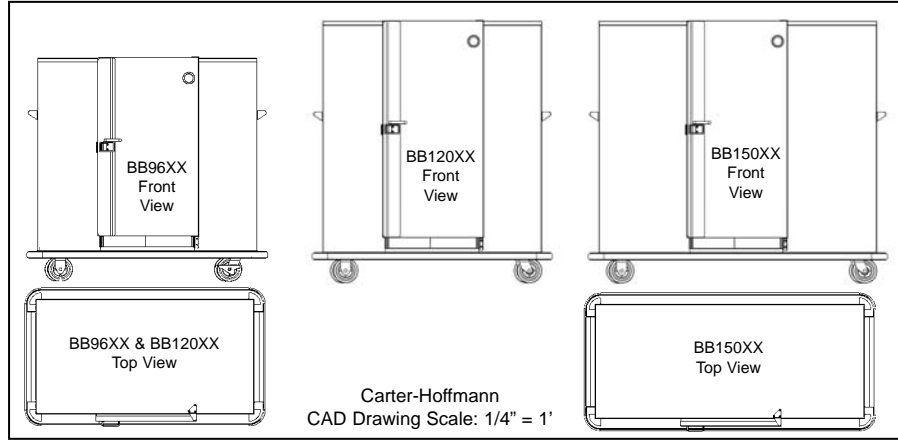

Model Number	Plate Capacity*			Number of Shelves	Clearance Between Shelves		Shelf Size		Overall Dimensions			Caster Diameter		Shipping Weight				
	with "P" carriers	with "C" carriers	without carriers		in	mm	in	mm	Height	Depth	Width	in	mm	lbs	kgs			
<input type="checkbox"/> BB96XX	96	120	120	3	13	330	51x26 <sup>1</sup> / <sub>2</sub>	1295x673	54	1346	35	889	59 <sup>1</sup> / <sub>2</sub>	1511	6	152	545	247
<input type="checkbox"/> BB120XX	120	144	144	3	16	406	51x26 <sup>1</sup> / <sub>2</sub>	1295x673	64 <sup>3</sup> / <sub>4</sub>	1645	35	889	59 <sup>1</sup> / <sub>2</sub>	1511	6	152	575	261
<input type="checkbox"/> BB150XX	150	180	180	3	16	406	63 <sup>3</sup> / <sub>8</sub> x26 <sup>1</sup> / <sub>2</sub>	1610x673	64 <sup>3</sup> / <sub>4</sub>	1645	35	889	72 <sup>1</sup> / <sub>4</sub>	1835	6	152	615	279

\*Capacity based on common plate depth and combined plate/cover height of 2.5". Due to the variety of plate thicknesses and depths, as well as plate cover heights, actual capacity may vary.

**CONSTRUCTION...** Completely welded double wall cabinet construction with outer cabinet formed and welded to base. All seams turned in to eliminate raw edges.

**CABINET MATERIAL...** All stainless steel construction; 20 gauge polished exterior and 24 gauge interior.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters with 1"x1" stainless steel perimeter channel supports.

**CASTERS...** 6" diameter, industrial grade polyurethane casters. Two swivel and two rigid. Sealed roller axle bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base in offset "wheel ahead" pattern. Two casters fitted with brakes.

**BUMPER...** Non-marking gray vinyl bumper set in heavy duty 3/16" extruded aluminum frame with reinforced corner "cut-outs."

**INSULATION...** 1" thick high density continuous wrap-around type fiberglass insulation with 1 1/2" thickness on top.

**GASKET...** High temperature silicone gasket mounted to cabinet.

**DOOR...** Welded double stainless steel door. Filled with 1" thick fiberglass insulation.

**HINGES...** Concealed, stainless steel hinge with 5/16" pin.

**PUSH HANDLES...** Two horizontal full width stainless steel tubular push handles with back-up plates. Mounted to each end of the cabinet.

**LATCH...** Flush mounted, heavy-duty sliding latch with exclusive grip handle.

**SHELVES...** Welded, duplex nickel-plated removable wire shelves.

**THERMOMETER...** Dial type with remote sensing bulb and sensing bulb protector. Mounted to door.

**HEATING SYSTEM...** Bottom mounted heater. Stainless steel construction. Removable without tools. 1600 watt inconel-sheathed heating element. High impedance protected, internally cooled fan motor. Full range thermostat and power indicating light.

**ELECTRICAL CHARACTERISTICS...** Operates on 120 volts, 60 cycle, single phase, 1650 watts, 13.7 amps. Ten foot rubber cord with 3 prong grounding plug. NEMA 5-15P plug.

**PERFORMANCE...** Capable of heating to 200° F (94° C). Preheat to 160° F (71° C) in approximately 20 minutes.

**ACCESSORIES/OPTIONS...**

- 4 wheel brakes
- Alternate electrical configurations
- On/Off heater toggle switch
- Top mounted transport latch
- Locking paddle latch
- Lexan thermometer cover
- Cold plate
- Alternate caster sizes & types
- Menu card holder
- Plate carriers - specify open "P" type or covered plate "C" type

Specifications subject to change through product improvement & innovation.

# SPECIFICATIONS

Printed in U.S.A. B56 0412  
Carter-Hoffmann is a trademark  
of Carter-Hoffmann LLC.



**CARTER-HOFFMANN**  
1551 McCormick Ave., Mundelein, IL 60060  
(847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)

# FEATURES & BENEFITS

1551 McCormick Avenue, Mundelein, Illinois 60060  
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981  
[www.carter-hoffmann.com](http://www.carter-hoffmann.com)



NSF/ANSI 4

## BB96XX, BB120XX & BB150XX BANQUET CARTERS

*Since 1947, Foodservice Equipment That Delivers!*

### DOUBLE WALL STAINLESS STEEL

**CABINET...** Strongest, most durable materials for long life. High density 1" thick fiberglass in walls and door, 1 1/2" thick on top for maximum heat retention.

### HEAVY-DUTY STAINLESS STEEL BASE FRAME...

12 gauge caster bolsters with perimeter frame for rugged use and added durability.



BB96XX

### COMPLETELY WELDED TURNED-IN SEAM CONSTRUCTION...

Adds rigidity to entire cabinet and eliminates raw edges for ease of cleaning and safety.

### WRAP-AROUND BUMPER...

Full perimeter aluminum bumper with non-marking gray vinyl insert. Protects cart and facility walls from damage.

### 6" DIAMETER INDUSTRIAL GRADE CASTERS WITH POLYURETHANE TREAD...

Long lasting and easy rolling for maximum load and minimum maintenance. Two swivel and two rigid. Swivel casters fitted with brakes. Mounted to base in offset wheel-ahead pattern for easy rolling over uneven surfaces.

### HIGH PERFORMANCE REMOVABLE HEATER...

Blower system for fast heat up, recovery and even heat distribution throughout cabinet. Removable without tools for easy service and cabinet cleaning.

### REMOVABLE WIRE SHELVES...

Welded, duplex nickel-plated with reinforced shelf clips. Sturdy for heavy plate loads and removable for cleaning.