



Job: Item No.:
Notes:
Model Number: PH1800 PH1825

Heated Transport Carts

SPECIFICATIONS



PH1825

DESCRIPTION

PH Series Heated Food Transport Cabinets are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a bottom-mounted lift-out heating system with dial controls and blower heat for even air flow throughout the cabinet. Transport features include wrap-around bumper, wheel-ahead caster pattern and insulated turned-in seam construction.

SHORT FORM SPECIFICATIONS

Heated food transport cart, electric, insulated, welded, turned-in seam stainless steel construction with side-mounted push handles and flush-mounted transport latch with finger grip. Lift-out, convection heater. Stainless steel tray racks at 1.5" spacing for 18"x26" sheet pans. Non-marking gray vinyl wrap-around bumper. 5" or 6" polyurethane casters set in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1650 watts, 13.7A, ten-foot 3 prong 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

FEATURES

- Bottom mounted, 1650 watt, removable heating system
- Dial thermometer with remote sensing bulb
- Capable of heating to 200°F (93°C); pre-heat to 160°F (71°C) in approximately 25 minutes
- All welded, turned-in seam, stainless steel construction
- Two heavy-duty aluminum vertical push handles bolted to sides with reinforced back-up plates
- Double panel door with vinyl gasket; filled with 1" thick high-density fiberglass insulation
- Concealed, stainless steel pin hinge; 270° door swing
- Flush mounted sliding latch with finger grip
- High temperature magnetic door gasket mounted to door
- All-swivel polyurethane casters; two fitted with brakes
- Offset wheel-ahead caster pattern
- Non-marking gray vinyl bumper set in heavy-duty extruded aluminum frame
- Removable tray racks with channel slides at 1.5" spacing
- Accommodates 18"x26" sheet pans

OPTIONS AND ACCESSORIES

- Menu card holder
- Polycarbonate thermometer cover
- Top-mounted transport latch with padlock hasp
- Locking paddle-style door latch
- Rack hold down device
- Heater hold down device
- Stainless steel push handles
- Alternate caster sizes and types
- Removable canned fuel holder
- Close-fit bumper

CERTIFICATIONS



WARRANTY

One-year warranty for parts and labor.



CARTER-HOFFMANN
1551 McCormick Avenue, Mundelein, IL 60060
847.362.5500 • 800.323.9793
www.carter-hoffmann.com

Follow us



Form PH1800_0621






Job: Item No.:
 Notes:
 Model Number: PH1800 PH1825

Heated Transport Carts

SPECIFICATIONS

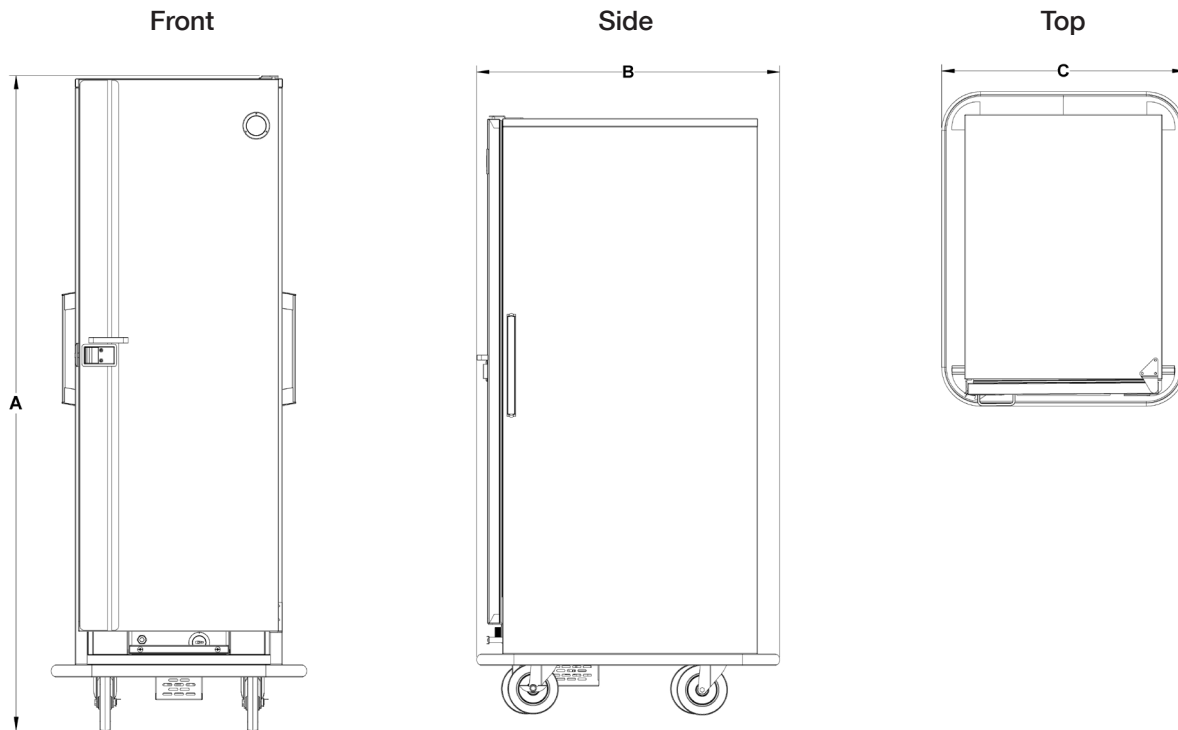


CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of least 36" at the front of the cabinet is required to open the door. Cabinet must be placed on a solid level floor.

ELECTRICAL DATA

Single electrical connection.
 120 Volts, 1650 Watts, 13.7 Amps, 60Hz, single phase.
 Ten foot three wire rubber cord with 3-prong grounding plug. NEMA 5-15P.



Model Number	Pan Capacity*	Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping weight	
		18"x26"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs
PH1800	29	46	1168	58	1473	36	914	27 ^{7/8}	708	5	127	260	118
PH1825	36	57 ^{1/4}	1454	71	1803	36	914	27 ^{7/8}	708	6	152	328	149

*Pan spacing at 1.5" (38mm)

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.