

Empura®



Gas Fryers

EGF-40/50



EGF-45/55

EGF-70/80



Features

- Stainless steel front and galvanized sides
- Cast iron vertical burner, each 30,000 BTU/hr
- Controlled temperature at (200°F- 400°F)
- Open S/S fryer pot with cold zone
- Standby S/S pilot for easy start
- 6" stainless steel leg
- Millivolt control valve
- Prompt response thermostat ensures fast temp recovery
- 450°F hi limit for safety
- 1 1/4" full port drain valve
- S/S heater exchanger with baffle for high efficiency
- S/S hanger plate at the back
- Two baskets

MODEL	# OF TUBES	EXT DIMENSIONS (W x D x H in inches)	CAPACITY (LBS)	TOTAL BTU's	NET WEIGHT	SHIPPING WEIGHT
EGF-45/50	3	15.5" x 15.49" x 39.36"	40	90,000	143 lbs	157 lbs
EGF-45/55	4	15.5" x 15.49" x 39.36"	50	120,000	157 lbs	181 lbs
EGF-70/80	5	21" x 20.98" x 39.36"	70	150,000	172 lbs	183 lbs

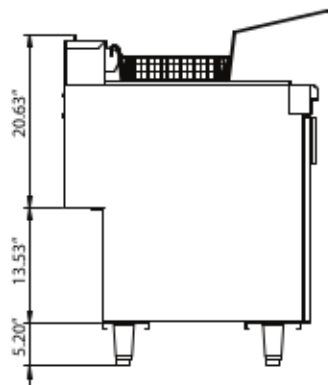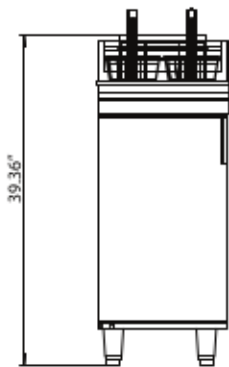

EGF-40/50

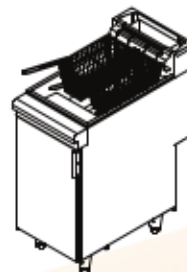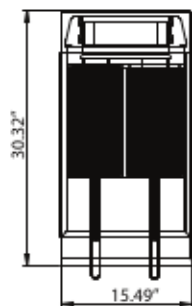

Warranty: 1 year parts only

Gas connection: 1/2" NPT on the rear of the appliance.
Gas regulator not included.

Clearance: Combustible: 6 inches sides, 6 inches rear, 16 inches to adjacent open flame burner units / Non-combustible: 0 inches sides 0 inches, 16 inches to adjacent open flame burner units.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

An adequate ventilation system is required for commercial cooking equipment.



Empura®

Gas Fryers





EGF-40/50

EGF-45/55



EGF-70/80

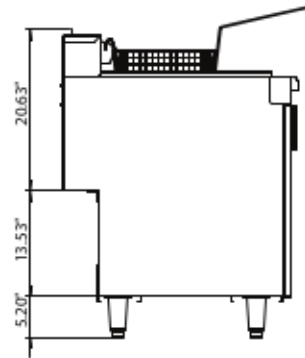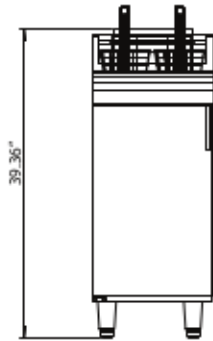

EGF-45/55

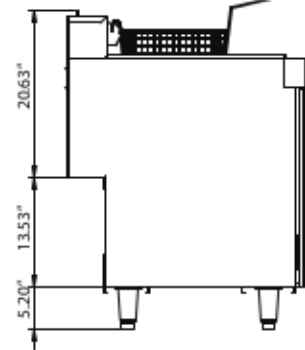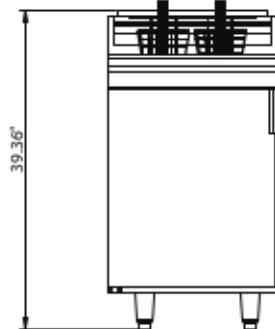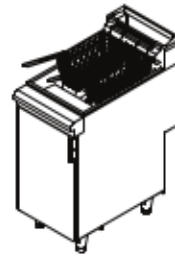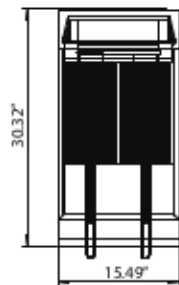

EGF-70/80

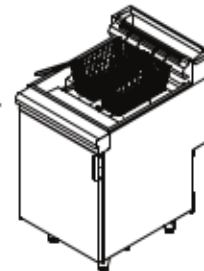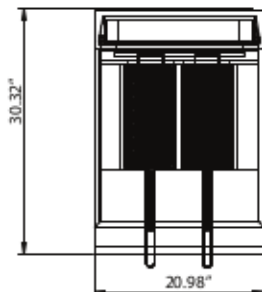

Warranty: 1 year parts only

Gas connection: 1/2" NPT on the rear of the appliance.
Gas regulator not included.

Clearance: Combustible: 6 inches sides, 6 inches rear, 16 inches to adjacent open flame burner units / Non-combustible: 0 inches sides 0 inches, 16 inches to adjacent open flame burner units.

Specify type of gas and altitude, if over 2,000 feet, when ordering.

An adequate ventilation system is required for commercial cooking equipment.