



Item # \_\_\_\_\_

Job \_\_\_\_\_




Casters (Stem Type)

## METRO® STEM CASTERS

- **Metro Stem-Type Casters** are designed to fit Super Erecta Shelf® posts to form shelf carts and other mobile units.
- **Stainless Steel, Cart-Washable Casters** offer grease seals and zerk fittings. Can withstand high-pressure washings.
- **Polymer Horn Casters:** Innovative polymer stem casters offer corrosion resistance and enhanced durability. For all medium-duty applications.
- **Resilient Rubber Tread:** A molded, soft tread that provides good floor protection along with quiet operation. Non-marking.
- **Polyurethane Tread:** Long-wearing; resists abrasion. Non-marking, shock absorbing.
- **Wheel Brakes:** Foot-operated. Available on all caster models.
- **Caster Load Ratings:** From 125 lbs. to 300 lbs. (57 to 136kg) See chart.
- **Donut Bumpers:** Furnished standard on all Metro stem casters.
- **Additional Caster Types Available.**

**Note:** SPECIAL WHEELS — V-groove, Conductive, Steel and Phenolic — are available on request. For additional information, contact InterMetro Industries Corporation or your InterMetro representative.


### Resilient Rubber

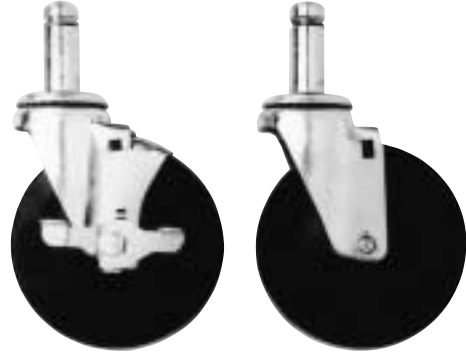

**5MB Wheel Brake**  
Includes Donut Bumper  
(not shown)

**5M Resilient**  
Includes Donut Bumper  
(not shown)

### Stainless Steel, Cart Washable

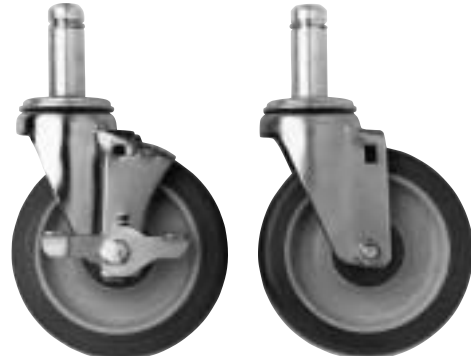

**5MDBGSA**

**5MDGSA**

### Polymer Horn Casters



**5PCB**

**5PC**



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com

Copyright © 2000 InterMetro Industries Corp.

11.20



# METRO® STEM CASTERS

## Dimensions Standard Casters — Stem Type

Cat. No.	Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(lbs.)	(kg)
4LD	4	102	1/2	12	125	56	Stem/Swivel	Resilient	1 1/2	.6
5LD	5	127	1/2	12	125	56	Stem/Swivel	Resilient	2	.9
5M	5	127	1 1/4	32	200	90	Stem/Swivel	Resilient	2 1/2	1.1
5MB	5	127	1 1/4	32	200	90	Stem/Brake	Resilient	2 3/4	1.2
5MR	5	127	1 1/4	32	200	90	Stem/Rigid	Resilient	3 1/2	1.5
5MDA	5	127	1 1/4	32	250	111	Stem/Swivel	High Modulus Donut	2 1/2	1.1
5MDBA	5	127	1 1/4	32	250	111	Stem/Brake	High Modulus Donut	2 5/8	1.17
5MDRA	5	127	1 1/4	32	250	111	Stem/Rigid	High Modulus Donut	2 3/8	1.08
5MP	5	127	1 1/4	32	300	135	Stem/Swivel	Polyurethane	2 1/8	.94
5MPB	5	127	1 1/4	32	300	135	Stem/Brake	Polyurethane	2 1/4	1
5MPR	5	127	1 1/4	32	300	135	Stem/Rigid	Polyurethane	2	.9

**NOTE 1:** Stem casters are shipped with donut bumper **at no additional charge.**

**NOTE 2:** Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be** known.

**NOTE 3:** Load Height for all 5M, 5MD and 5MP casters —  $6\frac{3}{32}'' \pm \frac{1}{16}''$  (155 ± 1.5mm).

**NOTE 4:** Load Height for 4LD caster —  $4\frac{5}{8}'' \pm \frac{1}{16}''$  (118 ± 1.5mm).

**NOTE 5:** Load Height for 5LD caster —  $5\frac{5}{8}'' \pm \frac{1}{16}''$  (143 ± 1.5mm).

**NOTE 6:** Brakes are foot-operated.

## Stainless Steel Cart-Washable Casters — Stem Type

Cat. No.	Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(lbs.)	(kg)
5MDGSA	5	122	1 1/4	32	150	68	Swivel	High Modulus Donut	2 1/2	1.1
5MDBGSA	5	122	1 1/4	32	150	68	Brake	High Modulus Donut	2 5/8	1.17
5MDRGSA	5	122	1 1/4	32	150	68	Rigid	High Modulus Donut	2 3/8	1.08
5MPGSA	5	127	1 1/4	32	300	135	Swivel	Polyurethane	2 1/8	.94
5MPBGSA	5	127	1 1/4	32	300	135	Brake	Polyurethane	2 1/4	1
5MPRGSA	5	127	1 1/4	32	300	135	Rigid	Polyurethane	2	.9

**NOTE 1:** Stem casters are shipped with donut bumper **at no additional charge.**

**NOTE 2:** Rigid casters are held in position by a connecting channel. When ordering rigid casters, shelf width **must be** known.

**NOTE 3:** Load Height for all 5MD and 5MP casters —  $6\frac{3}{32}'' \pm \frac{1}{16}''$  (155 ± 1.5mm).

**NOTE 4:** All casters are grease sealed with zerk fittings in swivel and axle.

**NOTE 5:** Brakes are foot-operated.

**NOTE 6:** "D" in model number designates donut wheel made of high-modulus rubber.

## Polymer Casters — Stem Type

Cat. No.	Wheel Diameter		Face		Load Rating		Type	Wheel Tread	Approx. Pkd. Wt.	
	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			(lbs.)	(kg)
5PC	5	127	1 1/4	32	300	135	Swivel	Polyurethane	2	.9
5PCB	5	127	1 1/4	32	300	135	Brake	Polyurethane	2	.9
5PCR	5	127	1 1/4	32	300	135	Rigid	Polyurethane	2	.9

**NOTE 1:** Optional thread guards (blue) may be ordered by adding "-TG" to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

**NOTE 2:** Stem casters are shipped with donut bumper **at no additional charge.**

**NOTE 3:** Rigid casters are held in place by a connecting channel. When ordering, shelf depth **must be** provided.

Manufactured by:



**InterMetro Industries Corporation**

North Washington Street, Wilkes-Barre, PA 18705

Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232

Visit Our Web Site: [www.metro.com](http://www.metro.com)

L02-041  
Rev. 9/00  
Printed in U.S.A.

Information and specifications are subject to change without notice. Please confirm at time of order.