



|              |          |         |       |
|--------------|----------|---------|-------|
| PROJECT NAME | LOCATION |         | AIA # |
| ITEM #       | QTY      | MODEL # | SIS # |

# SPEC SERIES®

REACH-IN SOLID SWING DOOR DUAL TEMPERATURE REFRIGERATOR/FREEZER

| models | STR2DT-2S | STA2DT-2S | STG2DT-2S |
|--------|-----------|-----------|-----------|
|--------|-----------|-----------|-----------|




| STR2DT-2S       |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Stainless steel side walls, back, floor, door liner, & ceiling. |
| <b>Shelving</b> | (1) Interior kit option included per full section.              |

| STA2DT-2S       |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, front & sides.                            |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| <b>Shelving</b> | (3) Heavy duty, chrome plated, wire shelves per section.        |

| STG2DT-2S       |   |
|-----------------|---|
| <b>Exterior</b> | Stainless steel door, with matching aluminum sides.             |
| <b>Interior</b> | Aluminum side walls & back.<br>Stainless steel floor & ceiling. |
| <b>Shelving</b> | (3) Heavy duty, PVC coated, wire shelves per section.           |

## plan view

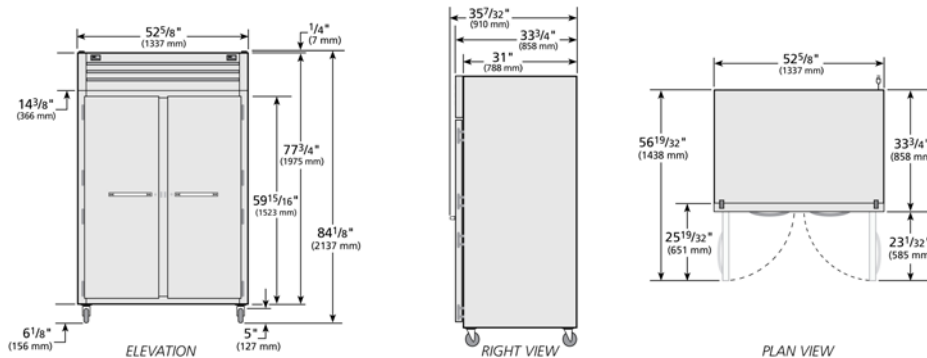

## SPECIFICATIONS

| Dimensions      | in.                            | mm.           |
|-----------------|--------------------------------|---------------|
| Length          | 52 <sup>5</sup> / <sub>8</sub> | 1337          |
| Depth           | 33 <sup>3</sup> / <sub>4</sub> | 858           |
| Height          | 77 <sup>3</sup> / <sub>4</sub> | 1975          |
| Electrical      | U.S.                           | International |
| HP Refrigerator | 1/3                            | N/A           |
| HP Freezer      | 1/2                            | N/A           |
| Amps            | 11.6                           | N/A           |
| Voltage         | 115/60/1                       |               |
| NEMA            | 5-20P                          |               |
| Cord Length     | 9 ft.                          | 2.74 M.       |



\* Height does not include 6<sup>1</sup>/<sub>8</sub>" (156 mm) for castors or 6" (153 mm) for optional legs. Height does not include 1/4" (7mm) for system mechanical components.  
 † Depth does not include 1 1/2" for door handle.

Specifications subject to change without notice.  
 Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).

MADE WITH INNOVATION IN THE USA  
 5 YEAR WARRANTY  
 CUL US  
 Printed in U.S.A.

APPROVALS

AVAILABLE AT



|              |          |         |
|--------------|----------|---------|
| PROJECT NAME | LOCATION | AIA #   |
| ITEM #       | QTY      | MODEL # |
|              |          | SIS #   |

# SPEC SERIES®

REACH-IN SOLID SWING DOOR DUAL TEMPERATURE REFRIGERATOR/FREEZER

|        |           |           |           |
|--------|-----------|-----------|-----------|
| models | STR2DT-2S | STA2DT-2S | STG2DT-2S |
|--------|-----------|-----------|-----------|



## standard features

### REFRIGERATION SYSTEM

- Two independent, self contained refrigeration systems; CFC free, environmentally friendly and factory balanced.
- R134A refrigerator refrigerant - R404A freezer refrigerant.
- High capacity, factory balanced system that maintains 33°F to 38°F (.5°C to 3.3°C) in the refrigerator section (Refrigerator on left side) and -10°F (-23.3°C) in the freezer section (Freezer on right side).
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Top mounted refrigeration system with evaporator positioned out of food zone to maximize capacity.
- Freezer features automatic defrost system, time-initiated, time-terminated.
- Automatic evaporator fan motor delay during defrost cycle.

### CABINET CONSTRUCTION

- Insulation - entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 5" (127 mm) diameter plate castors - locks provided on front set.

### DOORS

- Lifetime guaranteed bolt style door locks standard.
- Lifetime guaranteed heavy duty all metal working door handles.
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.

### LIGHTING

- LED interior lighting, safety shielded.

### MODEL FEATURES

- Two (2) exterior digital temperature displays, one for refrigerator section and one for freezer.
- Evaporator epoxy coated to eliminate the potential of corrosion
- Curb mounting ready.
- NSF/ANSI Standard 7 compliant for open food product.

### ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 20 amp dedicated outlet. Cord and plug set included.

### OPTIONAL FEATURES/ ACCESSORIES

*(upcharge & lead times may apply)*

- 6" (153 mm) standard legs.
- 6" (153 mm) seismic/flanged legs.
- 6" (153 mm) stainless steel legs.
- Field reversible hinge.
- Additional shelves.
- Stainless back. (STR, STA, STG)

### SHELVING KIT OPTIONS

- STR series kits factory installed at no charge. STA & STG series kits field installed, upcharge applies, lead times may apply.
- Kit #1: Nine (9) sets of #1 type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan or two (2) 14"L x 18"D (356 mm x 458 mm) pans.
- Kit #2: One (1) set half-section #2 steel rod tray slides and pilasters (field installed), rim support of one (1) 18"L x 26"D (458 mm x 661 mm) pan.
- Kit #3: Six (6) sets of universal type tray slides and pilasters (field installed), bottom support of one (1) 18"L x 26"D (458 mm x 661 mm) pan, two (2) 14"L x 18"D (356 mm x 458 mm) pans or two (2) 12"L x 20"D (305 mm x 508 mm) pans.
- Kit #4: Three (3) chrome shelves 26<sup>5</sup>/<sub>16</sub>"L x 21<sup>1</sup>/<sub>16</sub>"D (669 mm x 548 mm). Optional wall mounted shelf support pilasters (field installed) with four (4) shelf clips per shelf available; adjustable on 1/2" (13 mm) increments (must order at time of cabinet order).
- Additional kit option components available individually.

#### WARRANTY\*

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only)

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

\*RESIDENTIAL APPLICATIONS: TRUE assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



| Model       | Elevation | Right | Plan | 3D | Back |
|-------------|-----------|-------|------|----|------|
| ST( )2DT-2S |           |       |      |    |      |